

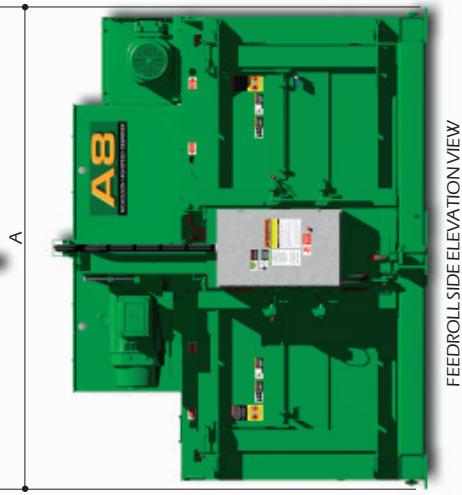
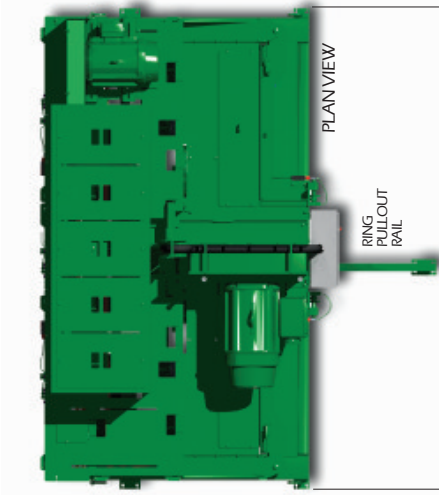


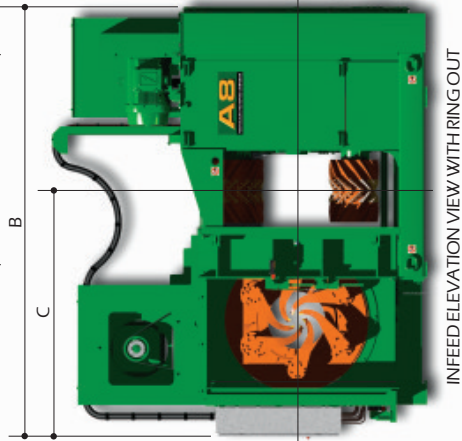

GENERAL DIMENSIONS A8 DEBARKER BY RING SIZE


	17 (43)	22 (56)	27 (69)	31 (79)	35 (89)
A	185.00 (470)	185.00 (470)	194.25 (494)	194.25 (494)	230.25 (585)
B	163.00 (414)	163.00 (414)	184.00 (467)	184.00 (467)	216.06 (549)
C	92.50 (235)	92.50 (235)	108.00 (274)	108.00 (274)	123.56 (314)
D	136.50 (347)	136.50 (347)	155.00 (394)	155.00 (394)	176.50 (448)

DIMENSIONS: INCHES (CM)

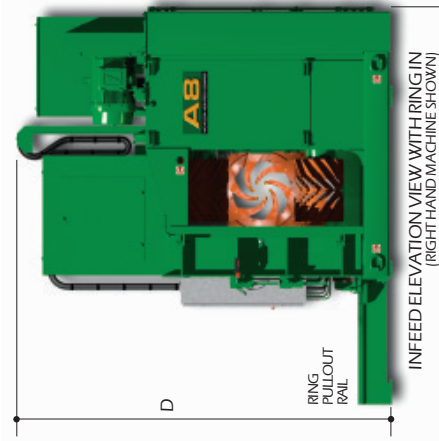

EXPERT NICHOLSON SALES SUPPORT NEAR YOU:
NICHOLSON MANUFACTURING LTD. 9896 GALARAN ROAD, P.O. BOX 2128 SIDNEY, BC CANADA V8L 3S6 TEL: 250-656-3131 FAX: 250-656-3111
SEND WORLD WIDE EMAIL TO: forestsales@nmhc.com SEE OUR WEBSITE AT: www.debarking.com

The manufacturer reserves the right to make changes or add improvements at any time without incurring any obligation to make changes on machines manufactured previously.
Actual product may vary from photograph and description.
11-000-022-B-01-04-22-001-2007-P-05

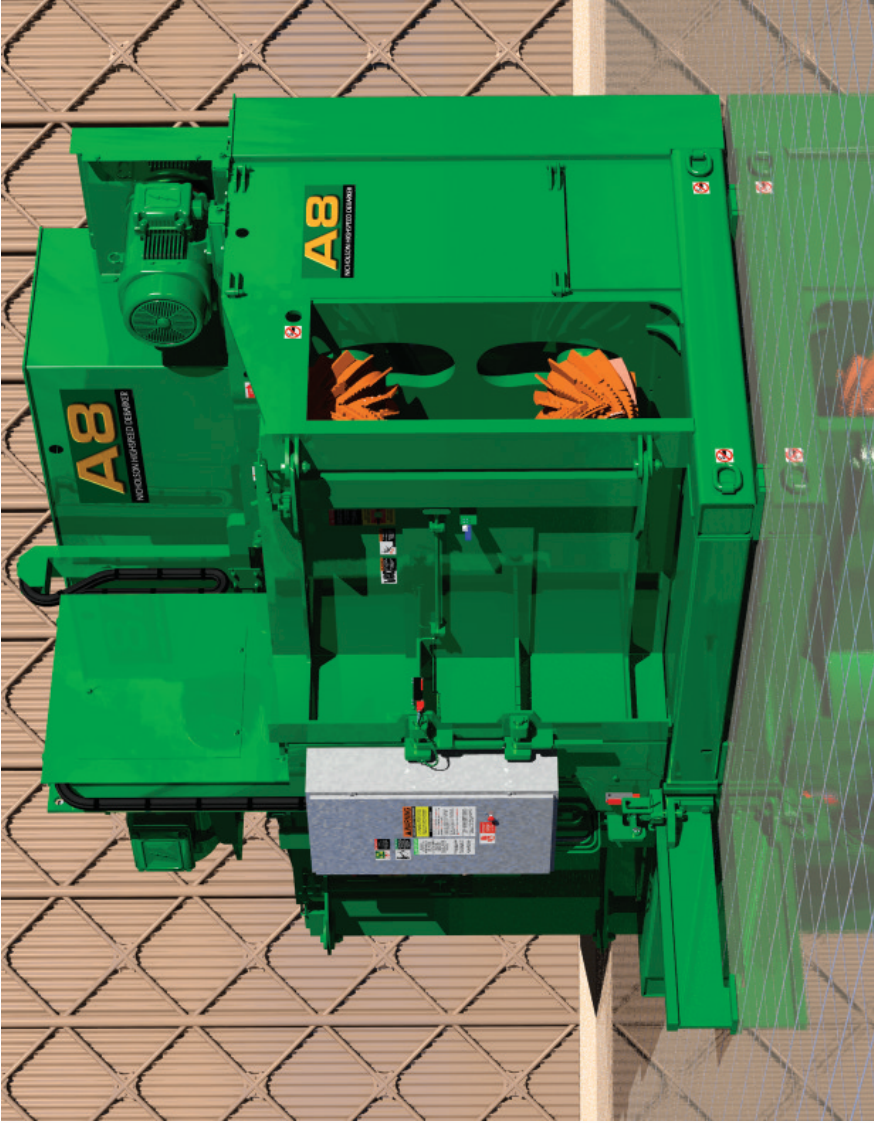



GET HIGH-SPEED PRODUCTION NOW, OR HAVE SIGNIFICANT RESERVE CAPACITY FOR YOUR FUTURE PRODUCTION REQUIREMENTS.

THE A8 INCORPORATES SOPHISTICATED DESIGN AND MANUFACTURING TECHNOLOGIES THAT GIVE YOU MORE PERFORMANCE AND RELIABILITY AT LOWER COST!

THE ADVANCED A8 IS QUICK AND EASY TO INSTALL AS A REPLACEMENT FOR EXISTING NICHOLSON A5 AND A7 DEBARKERS.



AUTOMATIC FAILSAFE RING AND GEAR LUBRICATION PROTECTS YOUR DEBARKER AT ALL TIMES.

DRIVE COVERS ARE SHOWN REMOVED FOR MAXIMUM ACCESS TO ALL COMPONENTS

THE A8 PROVIDES THE BEST AND SAFEST SERVICE ACCESS OF ANY DEBARKER

LOW MOUNTED AIR CYLINDERS ARE PROTECTED AND EASY TO SAFELY SERVICE.

THE A8 IS A SINGLE RUGGED UNIT THAT IS VERY EASY TO INSTALL

SOLID 3 INCH THICK STEEL NICHOLSON UNIBLOC PERIMETER FRAME IS MAINTENANCE FREE.

SMOOTH AND POWERFUL SINGLE MOTOR BELT DRIVE FOR LOW MAINTENANCE AND ENERGY SAVINGS.

REMOVABLE TOP PANELS FOR FULL ACCESS TO FEEDROLLS, WIRING, PIPING AND FEEDWORKS DRIVE.

INDIVIDUAL FEEDROLL AND RING AIR PANELS PROVIDE FAST SYSTEM RESPONSE AND ARE EASY TO ADJUST.

THE A8 USES ONLY SOLID AND RELIABLE COMPONENTS THAT HAVE BEEN PROVEN IN A WIDE RANGE OF APPLICATIONS WORLD WIDE.

PATENTED NICHOLSON FIBERGUARD FEEDROLLS SAVE FIBER AND SIGNIFICANTLY REDUCE MAINTENANCE COSTS.

THE FAST REACTING NICHOLSON AIR SEAL RING SAVES FIBER AND PROVIDES SUPERIOR BARK REMOVAL.

MASSIVE DOORS ARE LOG GUIDES AND OPEN TO PROVIDE FULL WIDTH ACCESS TO THE FEEDROLLS.

SINGLE POINT AIR AND CONTROL POWER HOOK-UP SITES

A8 AIR CYLINDERS LIFT ONLY THE LOG AND LOWER FEEDROLLS FOR MAXIMUM SERVICE LIFE.

TROUBLE FREE HARDENED STEEL GEARS.